


EXAMPLE OF BASIC CONTEST BOAT

REQUIREMENTS & OPTIONS:

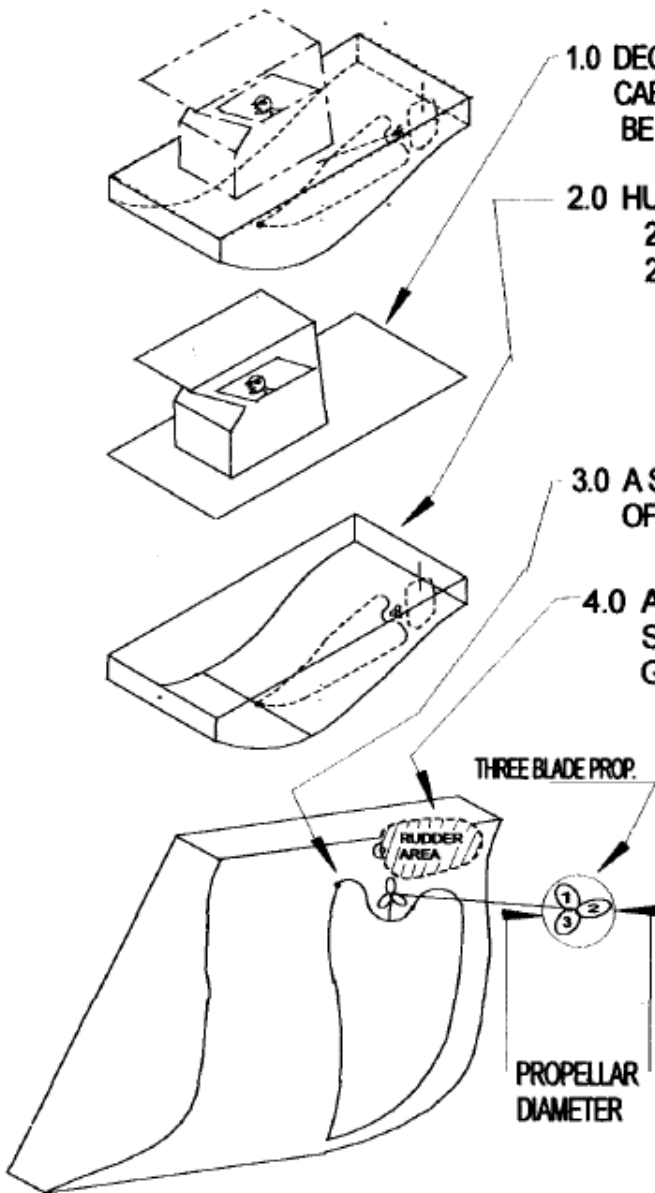

- 1.0 DECK & SUPERSTRUCTURE INCLUDING CABIN, ATTACHMENTS & FITTINGS CAN BE OF OPTIONAL DESIGN.
- 2.0 HULL REQUIREMENTS:
 - 2.1 FLAT BOW & STERN
 - 2.2 FLAT BOTTOM & SIDES CURVED FORE & AFT TO MEET THE SIDE PROFILE AS GIVEN ON SHEET 2. OF THESE REQUIREMENTS.
- 3.0 A SINGLE FLAT SURFACE SKEG OF OPTIONAL SHAPE MAY BE USED.
- 4.0 A FLAT RUDDER OF OPTIONAL SHAPE CANNOT HAVE AN AREA GREATER THAN 4 SQUARE INCHES.
- 5.0 A SINGLE 3 BLADE (MAX) PROPELLER, 1 1/2 INCH (MAX) IN DIAMETER, CAN BE ATTACHED TO THE PROPULSION ASSEMBLY. THIS ASSEMBLY CAN NOT BE USED TO STEER THE BOAT.
- 6.0 THE MAXIMUM VOLTAGE APPLIED TO THE MOTOR CAN NOT EXCEED 6 VOLTS DC.
- 7.0 KORT NOZZLES ARE NOT ALLOWED

NORTHWEST



SHIP MODELERS

SPRINGER CLASS R/C BOAT CONTEST REQUIREMENTS

REV. MAR.13,03
ISOSHT1

OF 2

SHEET 1